





Smart Solutions, Simply Affordable

Comes with 3 trunks / 8 extensions. Plus, hybrid ports to fit any phone, built-in caller ID detection and transmission, built-in DISA function, Voice Response System and best of all, NEC's reputation for quality. Aspila Topaz Lite incorporates performance and intelligence into a simple design. Open up your company's communication capabilities and be amazed.

Fully Hybrid Ports

Comes with hybrid ports to fit any combination of analogue SLT, proprietary keyphones, modems, facsimile machines, answering machines, cordless telephones and more.

NEC

Intelligence & Innovation

-[Built-in Caller ID Detection and Transmission which display the telephones numbers of incoming calls and/or □names.


-[Least Cost Routing (LCR) / Automatic Route Selection (ARS) which automatically selects the cheapest call rates [] from the service provider of your choice if you have more than one telephone service provider.

Expert Call Handling

Voice Response System (VRS)* and Voice Mail* which allow you to record up to 48 VRS messages, including Automated Attendant greetings and a General Message that can be personalised in the user's native language.

*Optional feature.



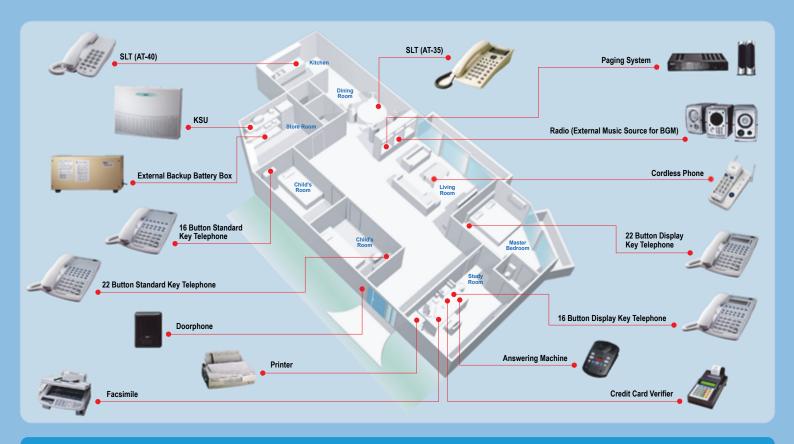

FEATURES LIST

□Abbreviated Dialing

☐Account Codes

∏Alarm

____Alphanumeric Display

Attendant Call Queuing

☐ Automatic Route Selection (F-Route)

Background Music

*Barge In ☐Call Forwarding

□□ -[Fixed

-[Off-Premise

- Abbreviated Dial

□□ -[follow Me

☐Call Forwarding / Do Not Disturb Override

Call Redirect

☐Call Timer ☐Call Waiting / Camp On

□Callback

□Caller ID

☐Central Office Calls, Answering

Central Office Calls, Placing

□Class of Service

☐☐ ☐(Max 8 conference calls x 4 groups)

☐Conference, Voice Call / Privacy Release

Continued Dialing

Department Calling

Department Step Calling □ Dial Number Preview

Dial Pad Confirmation Tone

Dial Tone Detection

Direct Inward Line (DIL)

□Direct Inward System Access (DISA)

*Direct Station Selection

☐ ☐ ☐(DSS) Console

□Directed Call Pickup

_ ☐Do Not Disturb

*Door Box

Fax Machine Compatibility

□Flash

☐Flexible System Numbering

Forced Trunk Disconnect

Group Call Pickup ☐ Handsfree and Monitor $\ \ \, \square \ \, \text{Handsfree Answerback} \, / \,$

☐☐ ☐Forced Intercom Ringing

*Headset Operation

Hold ☐Hotline

 \square Intercom

__ Last Number Redial

Least Cost Routing (LCR)

☐Line Preference

Long Conversation Cutoff

□Loop Keys

☐Meet Me - Conference

□□ - Paging Transfer

∏Memo Dial

Message Waiting

☐Microphone Cutoff ☐Multiple Directory Numbers /

Call Coverage

☐Message Waiting ☐Microphone Cutoff Multiple Directory Numbers /

□□ □Call Coverage

☐Music on Hold Name Storing

□Night Service

☐Off Hook Signaling

*Baging, External

□Paging, Internal

□Park Hold

PBX Compatibility

☐Prime Line Selection

☐Private Line

□ Programmable Function Keys

☐Pulse to Tone Conversion

Repeat Dial

Remote Maintenance

☐Ring Groups

Ringdown Extension, ☐☐ ☐Internal / External

□Room Monitor

Save Number Dialed ☐Secretary Call (Buzzer)

*Noice Response System (VRS)

□Volume Controls ☐Warning Tone For Long Conversation

☐Trunk Queuing / Camp On

□ Secretary Call Pickup

☐Tandem Trunking

☐Time and Date

☐Toll Restriction

□□ -[Dial Block

Trunk Group Routing

☐Trunk Groups

^{*}∏oice Mail

∏Transfer

Serial Call

☐Selectable Display Messaging

*Station Message Detail Recording

□□ □(Unsupervised Conference)

00 00 0 *Optional Features

SPECIFICATION

Guaranteed NEC INFRONTIA Quality

Main KSU Analog Trunk 3 Key Telephone 8 8 Single Line Telephone 8 (Total) DSS Console 50 Virtual Extension **DLS** Console 8 Doorphone Box 2 External Paging Output External MOH Input 2 2 (Total) **BGM** Input 2 Power Failure Transfer External Backup Battery 1

MECHANICAL SPECIFICATION

	Width (mm)	Depth (mm)	Height (mm)	Weight (kg)
308M KSU	360	90	275	2.8 fully equiped
Backup Battery Box	384	99	182	5.2 fully equiped

ELECTRICAL SPECIFICATION

Input Voltage (Frequency) 100 / 240 VAC (50 / 60 Hz) **Power Consumption** 120W



















